


THE SEQUEL SISKER IS NEVER

THS GOO

The new cordless

GoFree® Flex Pro II from ProTeam.

New motor, new runtimes & lighter weight.

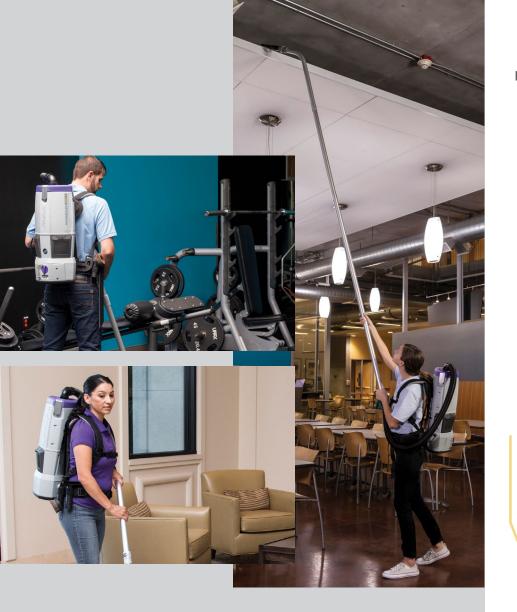

BOOST PRODUCTIVITY

You've never cleaned like this before.

With a high/low power switch and two battery options, the new GoFree Flex Pro II brings greater versatility and comfort to professional cleaners. By cleaning at a rate 30% faster than a corded backpack and 5x faster than an upright vacuum, the GoFree Flex Pro II will save you time and money. Created by the company with more than three decades of experience in productive, durable, clean-air vacuums.

FREEDOM OF MOVEMENT

FlexFit® articulating harness is responsive to the motion of your shoulders, back and hips-increasing comfort and reducing fatigue

HIGH/LOW SETTINGS

Conserve runtime

by tackling routine

then switch to high

for deep cleaning

cleaning on low,

NOTICEABLY QUIETER Only 63.9 dBA (low) and 65.9 dBA (high)

BRUSHLESS MOTOR

carbon dust

••••••

With no carbon brushes

to change, the motor has

a longer life and emits no



LIGHTWEIGHT BATTERY OPTION

runtime, approx. 101 mins. on low with 12 Ah or go lightweight with the 6 Ah battery with shorter total runtime



Clean with the longest

CLEAN AIR BACKPACK

ProLevel Filtration system, featuring multiple levels of filters, helps reduce allergens in the indoor environment

ProTeam is a proud partner of the American Lung Association.



The American Lung Association does not endorse product, device or service.

EASY TO READ CHARGE STATUS Lit display allows you to see charge levels



TWO BATTERY

OPTIONS

6 Ah or 12 Ah




LIGHTWEIGHT 15.5 lbs. (6 Ah) 17.5 lbs. (12 Ah)







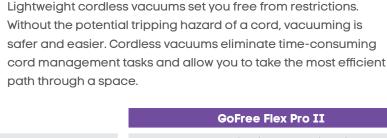



Motor Airflow

Static Lift

Power

Decibel

Capacity

ProLevel Filtration® w/ Four Levels of Filtration

*ProLevel Filtration System with HEPA Media

Battery Type

Certification

58 CFM (low) | 65 CFM (high) 67 in. (low) | 81 in. (high)

36 VDC / 240 W (low) | 345 W (high) 63.9 dBA (low) | 65.9 dBA (high)

6 qt. / 6.6 L

1054 sq. in total area

Captures 99.72% at 0.3-.5 microns per ASTM F3150

Lithium Ion

UL Listed to US and Canadian safety standards.

Α.	5	-	ro	V/	Dil	nti	me
A	IJ	IJ	ΙU	Х.	KU	II IU	HIE

Approx. Full Charge Time
Minimum Charge Cycles

Weight

Warranty

6 Ah	12 Ah
50 min. (low) 35 min. (high)	101 min. (low) 73 min. (high)
1.5 hrs.	3 hrs.
500	850
15.5 lbs.	17.5 lbs.
3 yrs - parts, labor 2 yrs - motor and charger 1 yr - battery Lifetime - molded body parts	3 yrs - parts, labor 2 yrs - motor, battery & charger Lifetime - molded body parts

CFM = Cubic Feet per Minute

dBA = A-Weighted Decibel Value

Ah = Amp Hours



proteam.emerson.com

866.888.2168 | customerservice.proteam@emerson.com



SPECIFICATION CALCULATIONS ARE BASED ON AVERAGE MOTOR PERFO